

ROJO COMPACT FLOAT VALVE

PRODUCT INFO



[COMPACT]
FLOAT VALVE



20 L / MIN

Description


Rojo Compact Valves are float operated valves for automatic filling of water storage vessels. The Rojo Compact can be **mounted above or below water level**. It is a simple mechanically operated valve. The **Rojo Compact** is the optimal choice for **low flow** when space is limited as the narrow weighted float makes for a compact versatile design.

Applications



Maintaining water levels in:

- Animal drinking troughs
- Water storage tanks
- Water Cisterns
- Process applications


Flow Graph

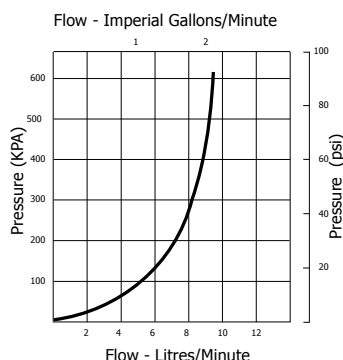



Mounting Positions



Top



Side



Bottom

NOTE: Package contains all parts required for any of these installations.

Options

Inlet sizes: 8mm 1/4" bsp/npt
15mm 1/2" bsp/npt
20mm 3/4" bsp/npt

Pressure Rating:

0 Bar (0 PSI) - 10 Bar (150 PSI)

Extension Arms:


50mm Extension Arm supplied Standard

Available Extension Arm Lengths:
25mm 50mm 75mm 100mm


Float: 50mm wide float supplied.
Note: 50mm Compact float is weighted





Specifies this Thread size



Inner Cartridge



Extension Arm



50mm

Features

- Fits in Compact spaces
- Float no wider than valve
- Multiple Mounting Positions
- Fully Adjustable Float
- Non-corrosive Material
- Flow stops when unscrewed
- Pressure range 0-10 Bar (0-150 PSI)
- Non corrosive material construction
- Has switch to lock valve in off position
- Helps to minimise water hammer

ROJO COMPACT FLOAT VALVE SPECIFICATION

PRODUCT	INLET SIZE	CODE		CODE
		BSP	NPT	
Rojo Compact	1/4"	8	0025	RJVC15
	1/2"	15	0050	RJVC20
	3/4"	20	0075	


ROJO COMPACT FLOAT VALVE

DIMENSIONS & MATERIALS




[COMPACT]
FLOAT VALVE


20 L / MIN

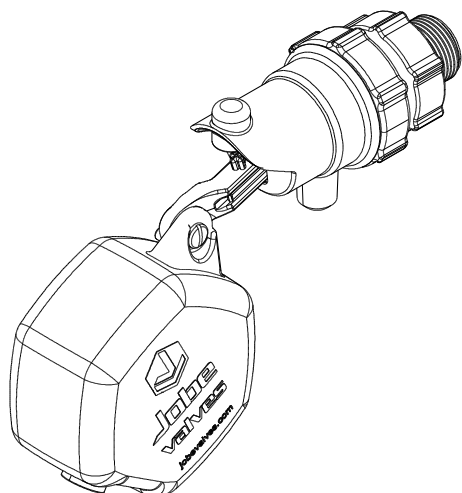

Rojo Dimensions

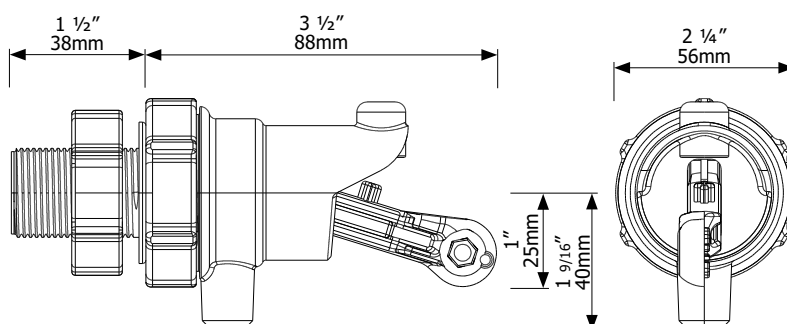

Float Dimensions

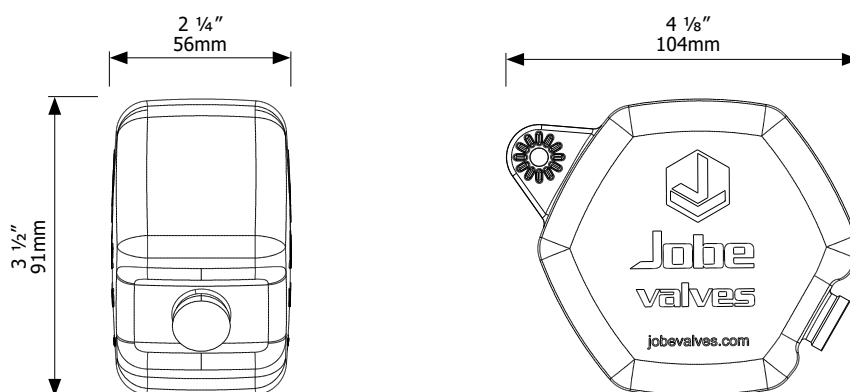

Part	Material	Part	Material
Valve Body	ABS	Float	HDPE
Tail & Nut Arm	Glass Filled Nylon	Seal Washer	LOPE
Extension Arm		Springs Bolts Nuts	304 Stainless Steel
Internal White Mouldings	Acetal	O'Rings	Nitrile
Yellow Valve Parts Filter			

Maximum Operating Temperature

60°C, 140°F

ROJO COMPACT FLOAT VALVE

PARTS IDENTIFICATION SHEET



[COMPACT]

FLOAT VALVE

20 L / MIN

