TOPAZ FLOAT VALVE

PRODUCT INFO









Description


Topaz trough valves are float operated valves for use in automatic filling of water troughs, tanks, cisterns etc. The valve is configured for **above or below water mounting**. The float operates a small pilot valve which in turn operates the main diaphragm valve. Topaz trough valves are a good choice where their **high flow**, compact, robust, non corrosive construction and high level of adaptability are needed.

Applications

Maintaining Water Levels in:

- Animal Drinking Troughs
- Water Storage Tanks
- Water Cisterns
- · Air Conditioning Systems
- High Pressure Cleaning Systems
- Irrigation Applications

Flow Graph




Key- 15mm (½")

20mm (¾") 25mm & 32mm (1" & 1 ¼")

Features

- High flow
- Compact robust construction
- Mounts horizontally or vertically
- Made from corrosion resistant materials
- Shuts down slowly to minimise water hammer
- 20 60mm (¾" 2 ½") water level differential (increases as water inlet pressure increases)
- Pressure rating 0.3 7 Bar (5 - 100 PSI)
- Float position easily adjustable with no tools
- Valve has switch to lock it in off position
- Has port to connect Frostpro anti freeze device

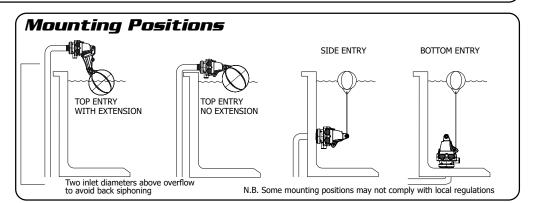

Opti	ions	5									
	BSP				NPT				Long Tail: Supplied with backnut		
Inlet Size	1/2"	3/4"	1"	1 ¼″	1/2"	3/4"	1"	1 ¼"		and seal was	sher.
Short Tail		√	1	√		1	1	1			
Long Tail	1	√	1	✓	√	1	√	1			
		pecifies hread s					Detac	-			
Floats: 125mm wide floats supplied standard. Note: Suitable for any mounting position							Standard	Optional	Optional		
70mm and 95mm floats optional Note: Suitable for top entry only.					al			Julius Valent Va			
									125mm	70mm	95mm

TOPAZ TROUGH VALVE SPECIFICATION							
PRODUCT	CODE	INLET SIZE	CODE		OPTION5	CODE	
			BSP	NPT			
Topaz	TPV	1/2"	15	0050	Detach Base	D	
Trough Valve		3/4″	20	0075	Long Tail Thread	LT	
		1"	25	0100	70mm wide Float	F70	
		1 ¼"	32	0125	95mm wide Float	F95	

(e.g) A Topaz Trough Valve with: 34" bsp inlet thread, detach base, long tail thread has the following spec number: TPV 20 D LT

NOTE: If no options are specified the standard ones will be supplied


Note: Product may differ slightly from these specs due to ongoing product development.


TOPAZ FLOAT VALVE

DIMENSIONS & MATERIALS





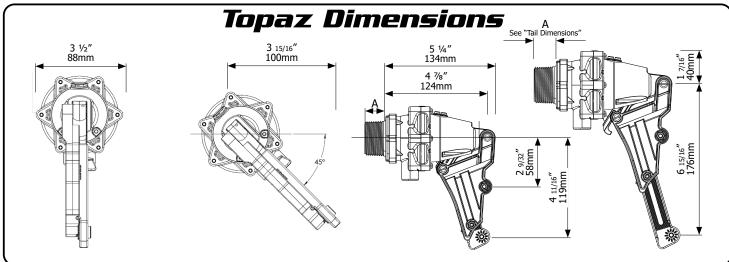

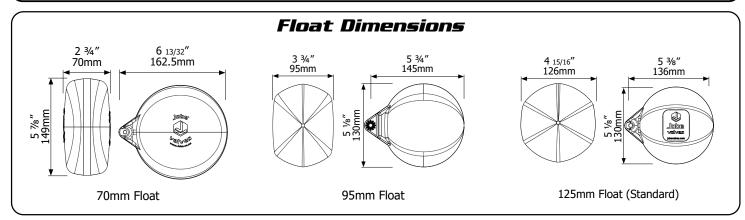

Part	Material	Part	Material	
Valve Body & Tail	Glass Filled Nylon	Float Cord	Polyester	
White & Yellow Internal Parts	Acetal	Springs, Bolts, Nuts, Pin, Screws	304 Stainless Steel	
Filter	PP/Nylon	O'Rings	Nitrile	
Diaphragm	EPDM	Float	HDPE	
Seal	TPU	Actuator / Arms & Caps	<i>AB</i> 5	

Tail Dimens	ions	
Dimension A	mm	inches
20mm (3/4") Short tail 25mm (1") bsp/npt short tail 32mm (1 1/4") bsp/npt short tail	22 22 25	% % 1
15mm (1/2") long tail 20mm (3/4") long tail 25mm (1") bsp/npt long tail 32mm (1 1/4") bsp/npt long tail	100 38 54 60	4 1 ½ 2 ½ 2 ¾ 2 ¾

Maximum Operating Temperature

60°C, 140°F

TOPAZ FLOAT VALVE


PARTS IDENTIFICATION SHEET








FLOAT VALVE



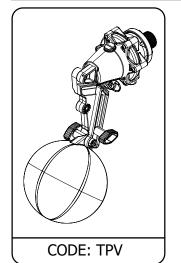


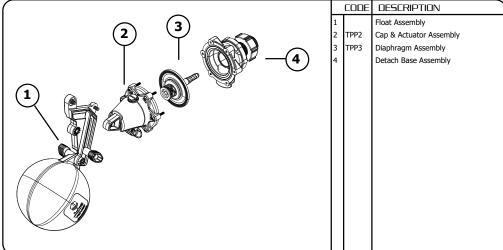


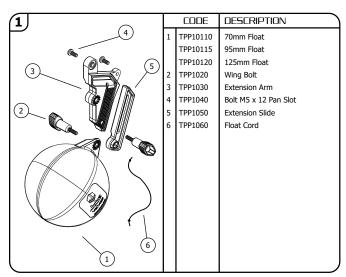

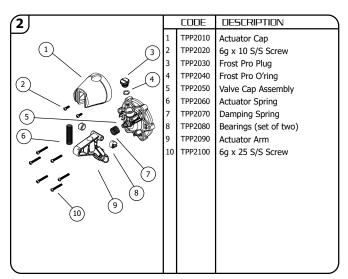

CODE

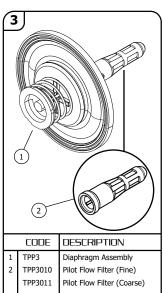

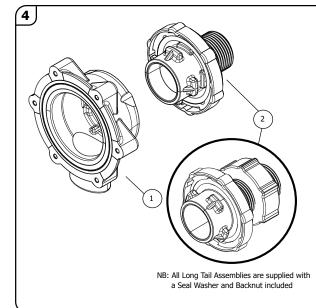

1	DTP1	Detach Base					
2		BSP Tails					
		Short Tail Assembly (BSP)					
	DTP020	Detach Tail 20mm(3/4") Short					
	DTP025	Detach Tail 25mm(1") Short					
	DTP032	Detach Tail 32mm(1 1/4") Short					
		Long Tail Assembly (BSP)					
	DTP015L	Detach Tail 15mm (1/2") Long					
	DTP020L	Detach Tail 20mm (3/4") Long					
	DTP025L	Detach Tail 25mm (1" bsp) Long					
	DTP032L	Detach Tail 32mm (1 1/4" bsp) Long					
		NPT Tails					
		Short Tail Assembly (NPT)					
	DTP0075	Detach Tail 3/4" npt					
	DTP0100	Detach Tail 1" npt					
	DTP0125	Detach Tail 1 1/4" npt					
		Long Tail Assembly (NPT)					
	DTP0050L	Detach Tail 1/2" npt Long					
ĺ	DTP0075L	Detach Tail 3/4" npt Long					
	DTP0100L	Detach Tail 1" npt Long					
l	DTP0125L	Detach Tail 1 1/4" npt Long					
ı)					

DESCRIPTION