

VORTEX PARTFILL

PRODUCT INFO




Description

Vortex Part Fill is a high flow valve intended for use in rain water harvesting tanks. The purpose of the float valve is to automatically maintain a low level of water in the tank during periods of no or low rainfall. This allows services fed by the tank to continue while leaving capacity in the tank for refilling by the next rain.

Applications

- Maintaining water levels in:
- Rain water harvesting tanks
 - Water cisterns
 - Irrigation and process applications.

Flow Graph (All Sizes)

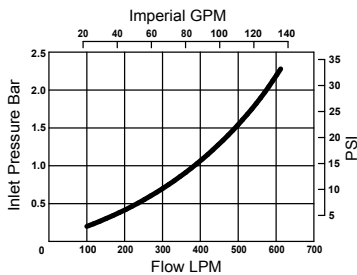


Features

- Ideal for use with all makes and models of rain water harvesting tanks
- Compact
- Constructed from non corroding materials
- Valve can be locked in off position using the lock off switch
- Up to 150mm differential obtainable (dependant on pressure)
- Valve unscrews from tail for easy Valve Access.

Available Inlet Sizes

VXVP32	32mm (1 1/4")
VXVP40	40mm (1 1/2")
VXVP50	50mm (2")
VXVP0125	1 1/4" NPT
VXVP0150	1 1/2" NPT
VXVP0200	2" NPT

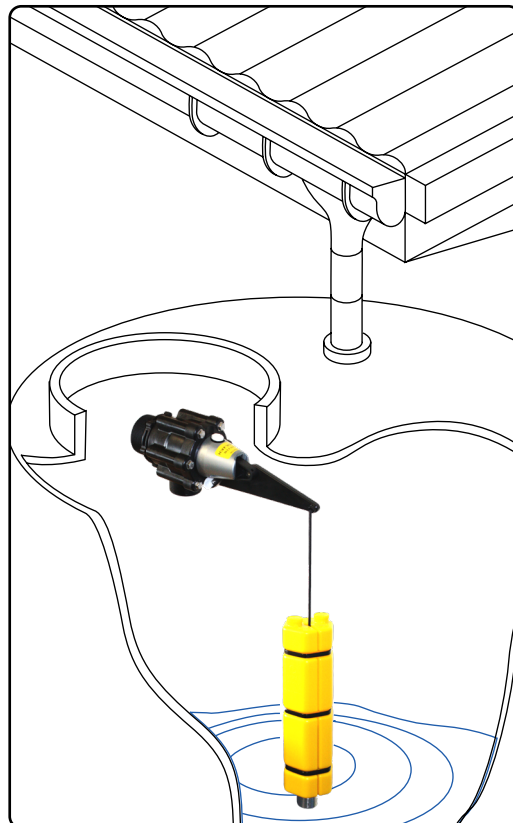


Principle of Operation

- The Valve is installed through the side wall of a storage tank. It should be mounted above the overflow level of the tank to prevent backflow.
- As the tank empties the weighted float travels down the cord and sits on the bottom stop to activate the valve.
- The valve will run until the weighted float lifts clear of the bottom stop.
- The float will then rise as rainwater fills the tank and falls as the tank water is used.
- The Valve will only function at times when rain fall is insufficient to maintain a water level in the tank above the bottom stop.

Pressure Range




0.3 Bar – 10 Bar (5 psi-150 psi)

Typical Installation

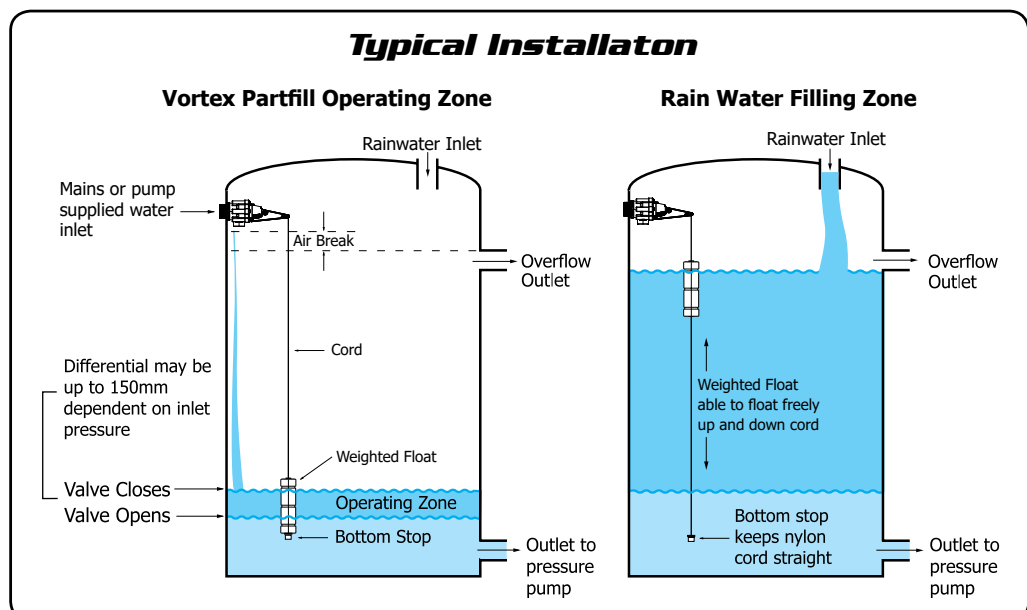

VORTEX PARTFILL

DIMENSIONS & MATERIALS

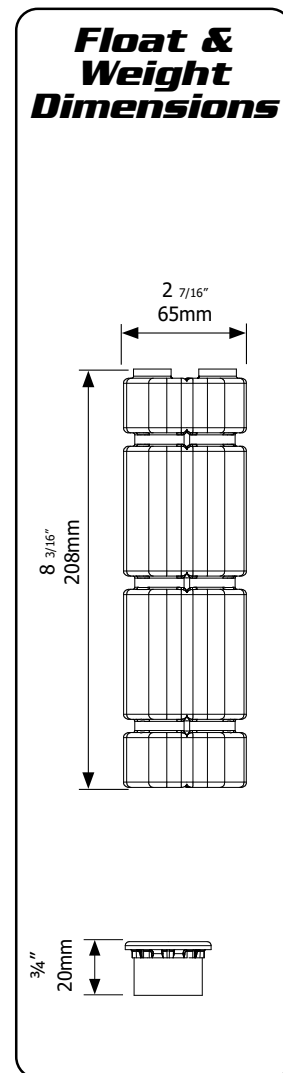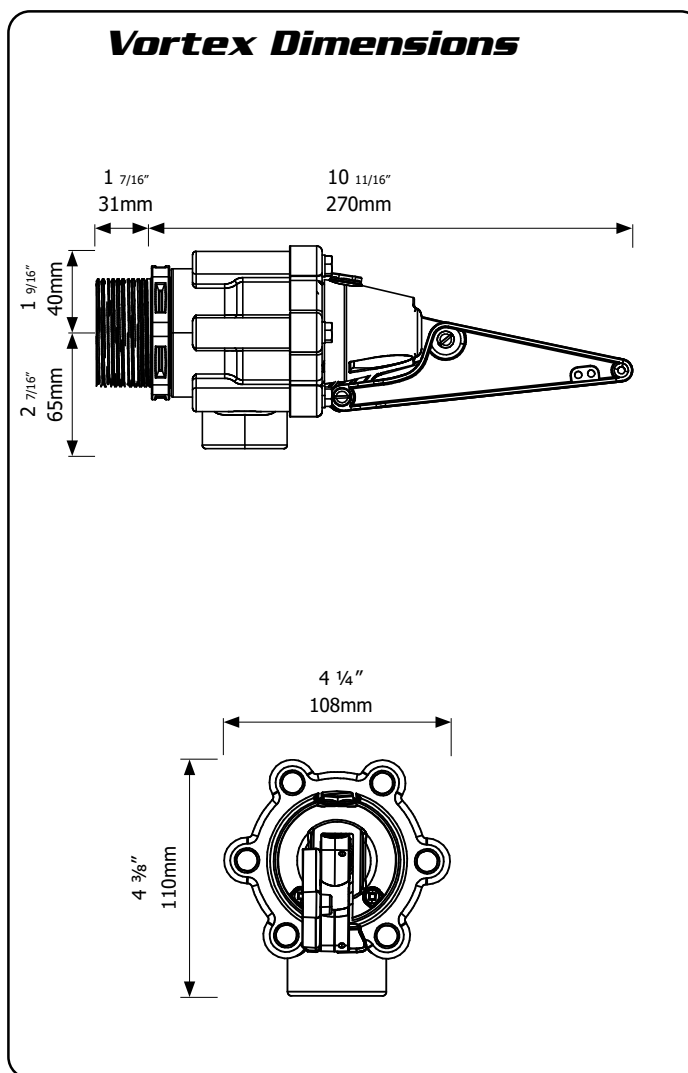
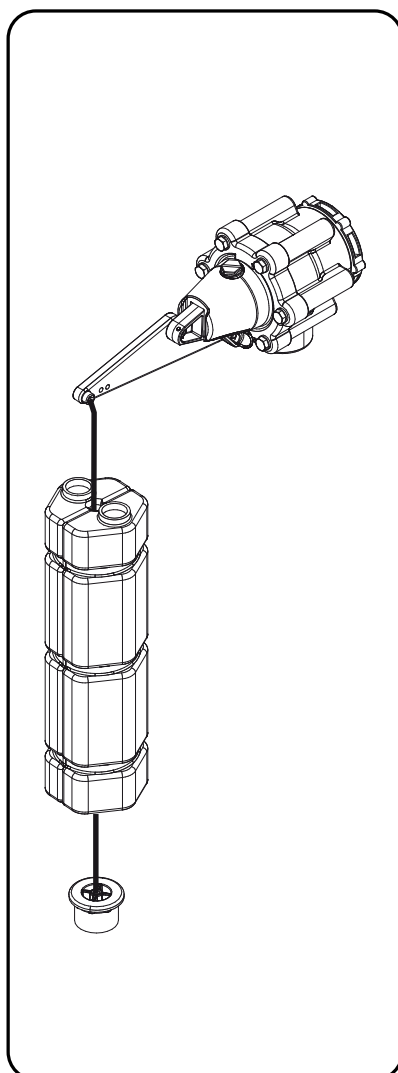


Part	Material	Part	Material
Valve Body	GF Nylon	Seal	TPU
White Internal Parts	Acetal	Springs, Bolts, Nuts, Pin, Screws	304 Stainless Steel
Arm Assembly	ABS	O'Rings	Nitrile
Diaphragm	EPDM	Float	HDPE


Maximum Operating Temperature **60°C, 140°F**

VORTEX PARTFILL


PARTS IDENTIFICATION SHEET

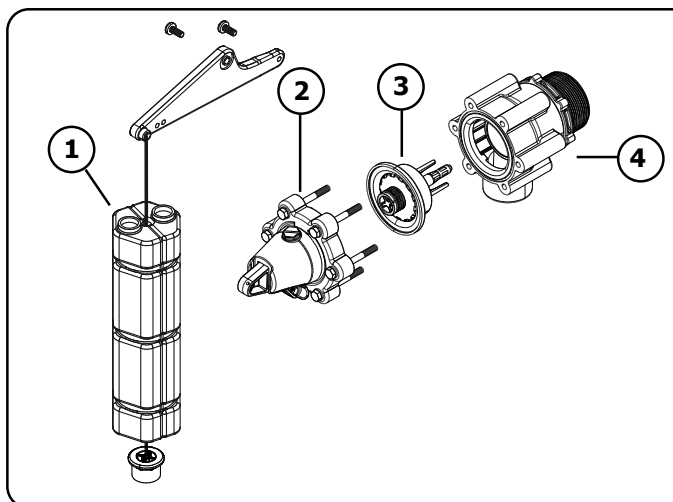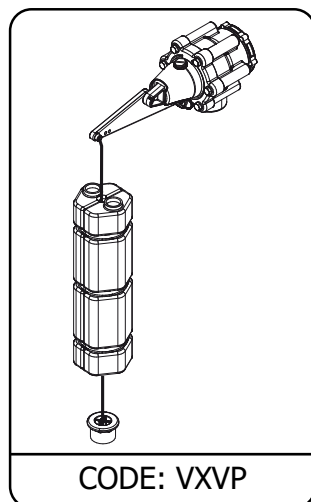



CODE	DESCRIPTION
1	VXPP1 Float Assembly
2	VXPP2 Cap & Actuator Assembly
3	VXP3 Diaphragm Assembly
4	Base Assembly

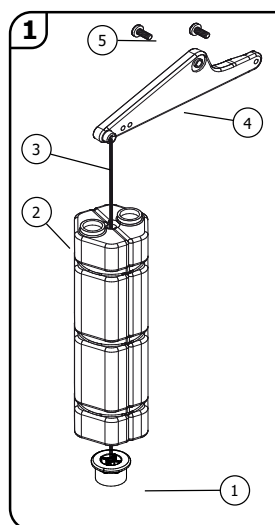

CODE	DESCRIPTION
1	VXPP1010 Bottom Stop
2	VXPP1020 Weighted Float
3	VXPP1030 Cord
4	VXPP1040 Arm Extension
5	VXPP1050 M5 x 12 Bolt

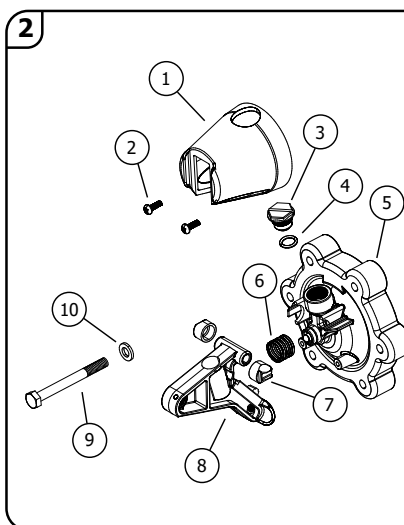

CODE	DESCRIPTION
1	VXPP2010 Actuator Cap
2	VXP2020 6g x 10 S/S Screw
3	VXP2030 Frost Pro Plug
4	VXP2040 Frost Pro O'ring
5	VXPP2050 Valve Cap Assembly
6	VXPP2060 Damping Spring
7	VXP2080 Bearings (set of two)
8	VXP2090 Actuator Arm
9	VXP2100 Bolt M6 x 65
10	VXP2110 Washer M6 x 12.5

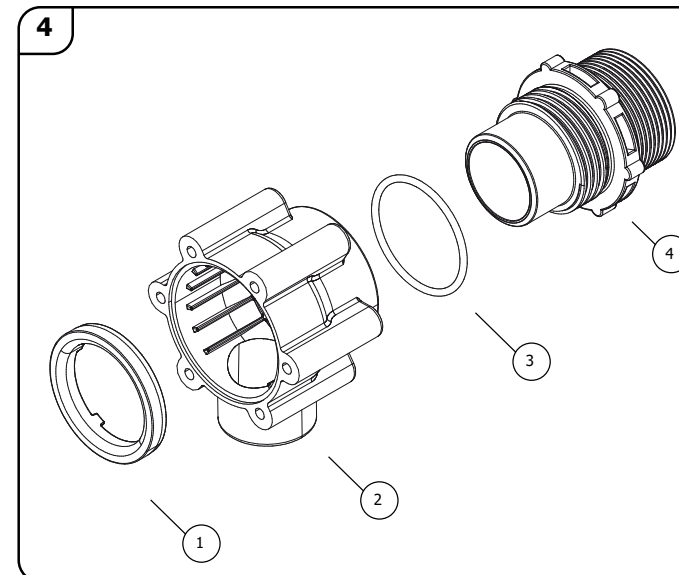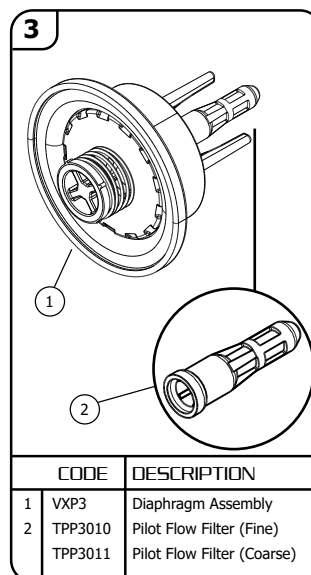

CODE	DESCRIPTION
1	VXP4010 Vortex Retainer
2	VXP4020 Vortex Base
3	VXP4030 Vortex O'ring
4	VXP4040 Vortex Tail 32mm
	VXP4045 Vortex Tail 40mm
	VXP4050 Vortex Tail 50mm
	VXP4055 Vortex Tail 1 1/4" NPT
	VXP4060 Vortex Tail 1 1/2" NPT
	VXP4065 Vortex Tail 2" NPT