

ROJO FLOAT VALVE

PRODUCT INFO



Description


Rojo Float Valves are float operated valves for automatic filling of water storage vessels. The Rojo can be **mounted above or below water level**. It is a simple mechanically operated valve. The Rojo is a good choice where its **low flow** is sufficient and its compact non corrosive construction is beneficial.

Applications

Maintaining water levels in:

- Animal drinking troughs
- Water storage tanks
- Water Cisterns
- Process applications


Flow Graph



Features

- Side, Bottom, Top Mounting
- Valve body screws apart by hand for easy servicing
- Flow stops when unscrewed for servicing
- Supplied with backnut and seal washer
- Built in check valve
- Fully adjustable float angle
- Pressure range 0-10 Bar (0-150 PSI)
- Low pressure model also available 0-5 Bar (0-75 psi) gives 60% more flow
- Non corrosive material construction
- Has switch to lock valve in off position

Mounting Positions

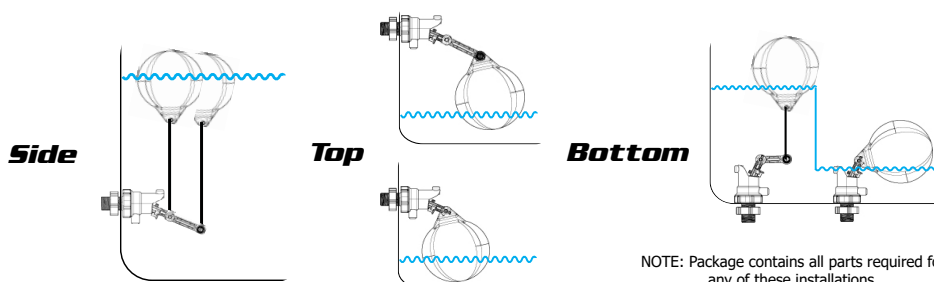

Options

Inlet sizes: 8mm 1/4" bsp/npt
15mm 1/2" bsp/npt
20mm 3/4" bsp/npt

Pressure Rating:

STD 0 Bar (0 PSI) - 10 Bar (150 PSI)
HF 0 Bar (0 PSI) - 5 Bar (75 PSI)


Extension Arms:

75mm Extension Arm supplied Standard

Available Extension Arm Lengths:
25mm 50mm 75mm 100mm

Floats: 125mm wide floats supplied standard.
Note: Suitable for any mounting position

70mm and 95mm floats optional
Note: Suitable for top entry only.

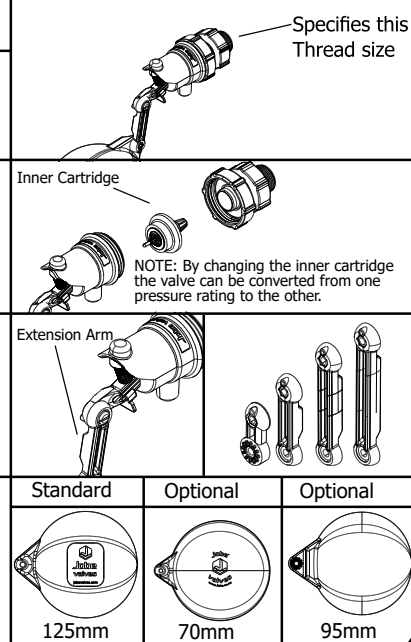

ROJO FLOAT VALVE SPECIFICATION




PRODUCT	CODE	INLET SIZE	CODE	OPTIONS	CODE
Rojo Float valve	RJV		BSP NPT	Low pressure	HF
		1/4"	8	25mm Extn Arm	A25
		1/2"	15	50mm Extn Arm	A50
		3/4"	20	75mm Extn Arm	A75
				100mm Extn Arm	A100
				70mm wide Float	F70
				95mm wide Float	F95

(e.g) A Rojo Float Valve with: 3/4" bsp inlet, 100mm Extn Arm, 95mm Float has the following spec number: **RJV 20 A100 F95** NOTE: If no options are specified the standard ones will be supplied

Note: Product may differ slightly from these specs due to ongoing product development.

ROJO FLOAT VALVE

DIMENSIONS AND MATERIALS

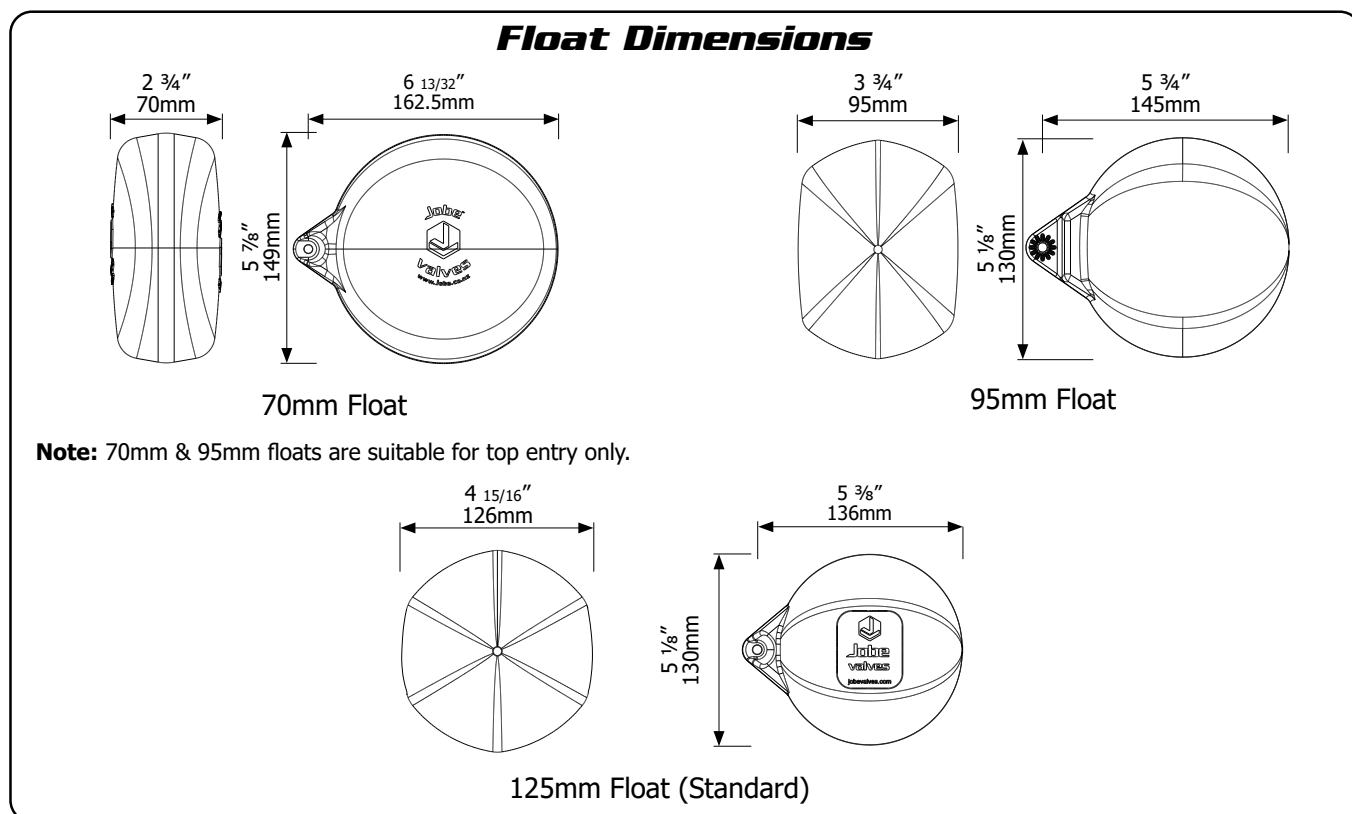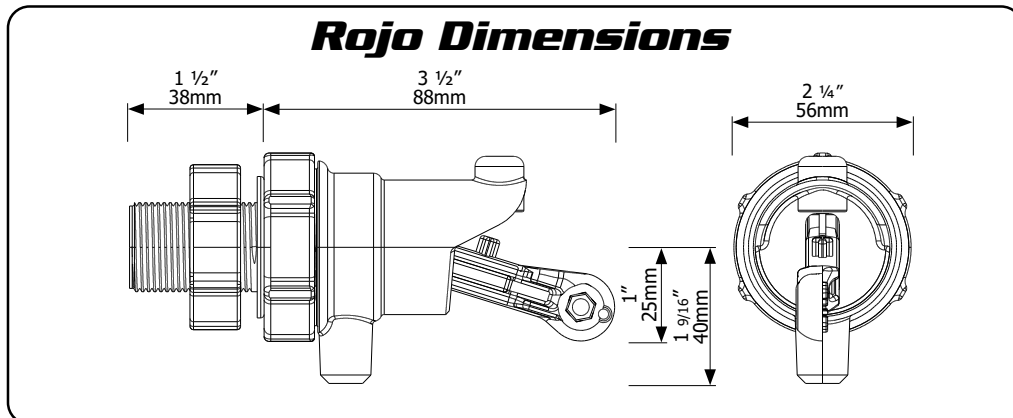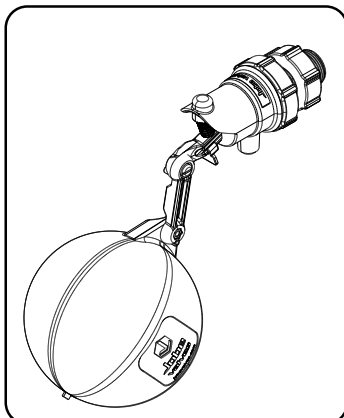

Note: 70mm & 95mm floats are suitable for top entry only.

Part	Material	Part	Material
Valve Body	ABS	Seal Washer	LOPE
Tail & Nut Arm	Glass Filled Nylon	Springs Bolts Nuts	304 Stainless Steel
Extension Arms Internal Black Mouldings		O'Rings	Nitrile
Yellow Valve Parts Filter	Acetal	Float Cord	Polyester
Float	HOPE		

Maximum Operating Temperature

60°C, 140°F

ROJO FLOAT VALVE

PARTS IDENTIFICATION SHEET

